



Genset

Model	JHK5-725GF
Voltage	230/400V
Frequency&Speed	50HZ;1500RPM
Prime Power	580kW/725kVA
Standby Power	640kW/800kVA



Compression Ratio: 14.5:1
 Bore: 159 mm
 Stroke: 159 mm
 Emission Certification:
 Governor Regulation: \cong 3%

➤ **Engine: Cummins KT38-GA**

➤ **Alternator: Stamford/Leroy Somer**
/Hengsheng

➤ **Controller: DeepSea/SmartGen/DEIF**
/ComAp

Aspiration: Turbocharged
 Displacement 38L
 No.of Cylinders 12
 Fuel System Cummins PT

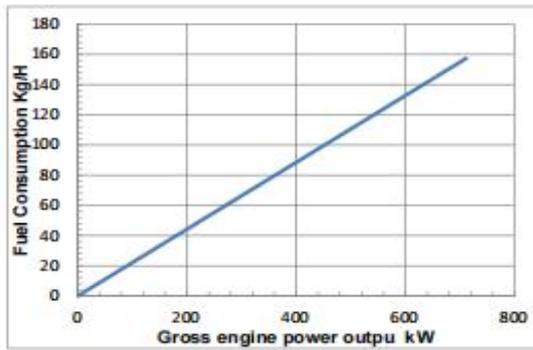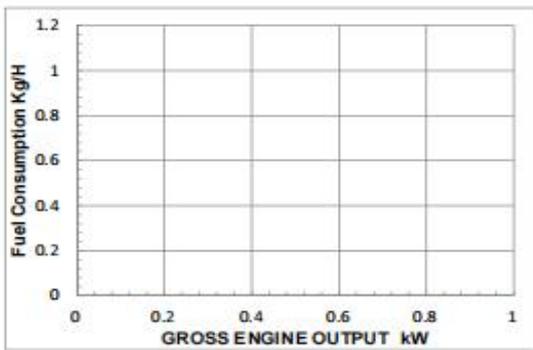

	OUTPUT POWER		CONSUMPTION		BFSC		
	%	BHP	Lb/h	Kg/h	g/kW.h	Lb/BHP.h	
			1800RPM				
			1500RPM				
STANDBY	100	953	711	347	157	221	0.364

Alternator

Pole No. 4-Pole
 Exciter Type Single bearing, Brushless, Self-excited
 Power factor 0.8
 Voltage adjust range \cong 5%
 Insulation Grade H
 Protection Grade IP23/22
 Phase / wire 3 phase 4 wires

- ✧ NEMAMG1.JIANGHAO, and ANSI standards compliance for temperature rise and motor starting.
- ✧ Sustained short-circuit current of up to 300% of the rated current for upto 10 seconds.
- ✧ Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the generator field.
- ✧ Self-ventilated and drip-proof construction.
- ✧ Superior voltage waveform from two-thirds pitch windings and skewed stator.
- ✧ Digital solid-state volts-per-hertz voltage regulator with +1% no-load to full-load regulation.

Control Panel



The control module gives digital readouts of:

Generator voltage;
Output frequency;
Engine speed;
Battery voltage;
Engine hours run.

The **control panel** is an Digital Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen and illuminated LEDs.

The control module has indicators for failure information:

Over speed/Low speed,
Emergency stop
Low oil pressure;
High water temperature
Failure to start
Battery charger failure



Dimension:4300*1800*2500mm
Weight:7100kg

Automatic shutdown occurs under:

Low engine oil pressure;
High engine water temperature;
Over speed/Low speed;
Failure to start after three attempts.

Electrical system

- Maintenance-free and anti-explosion battery
- Standard breaker
- ABB breaker (optional)
- ATS (optional)
- Battery charger (optional)
- GMS monitoring (optional)



Dimension:5800*2300*2550mm
Weight:11000kg
Fuel Tank Capacity:1200L

Packing

- Wrapping film packaging
- Tray packaging
- plywood box packaging

Jiangsu Jianghao Generator Co.,Ltd

Address: No.1 Xixu Road, Medical High-tech Zone,
Taizhou city, Jiangsu, China

Contact Person: Anthony Feng

Email: jhfsale@jhgenerator.com

WhatsApp: +86 18652649673

